Zenith Pro 900X



Display Type	 7" ESF CRT XGA 4/3 Elektrostatisch Fokussierte Röhre		
Ansi-Lumen	Projector: 783 900 Peaker Lumen	Screen: 261 Lux (bei 200 cm Screen)	
Contrast	Projector: -	Screen: -	
Black Level	Projector: -	Screen: -	
Offset	-		
Resolution	XGA 1024 x 768 786.432 Pixel		
Video Modes	NTSC, PAL, SECAM		
Application	CRT Projection | Small screen width, rooms with very little ambient light below 100 lumens.		
Light Source	CRT Röhre		
Light Life	ca. 10000 - 20000 h. (je nach Anwendung)		
Operating Costs	-		
Focus	Manual		
Zoom	No Zoom		
Objective	F=1,03 Hybrid		
Throw Ratio	-		
Audio	-		
Connections	S-Video in 5 x BNC in 1 x Video über BNC in D-sub 15pin in RS232C		
Ceiling Mounting	Yes		
Power	-		
Size WxHxD	-		
Operating Noise	-		

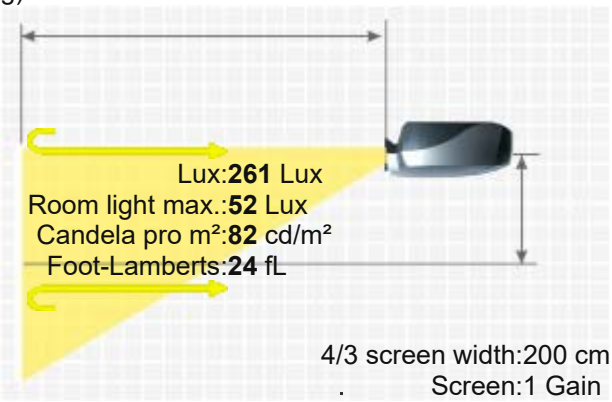

Weight	-
Keystone	-
Illumination	-
Frequenz	H-sync: 15-50 kHz V-sync: 40-100 Hz Range max.: 37,5 MHz
Foot-Lamberts	24 fL / max. 244 cm screen width 82 cd/m²
Features	■ Chamber filter ■ Gammer correction ■ Automatic timer on or off
Status	- Discontinued (EOL) // Last update of the data: 2023-08-04
Data	

ZENITH PRO 900X

More Details

HCinema

https://www.projector-database.com/pro/zenithpro900x-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.