

Toshiba TLP 561

TOSHIBA TLP 561



Brief Introduction

Beta 2.5

The standard portable TLP 561 LCD projector from Toshiba has 1300 Ansi lumens, a contrast of 400:1 and an XGA 1024 x 768 resolution. An image width of up to 314 cm is possible. However, the image should be smaller in room light. We recommend max. 209 cm. It is no longer offered by the manufacturer Toshiba.

Display Type



3 x 0,7" LCD TFT Panel MLA

XGA 4/3 Liquid Crystal Display with Micro Lense Array

Ansi-Lumen

1300

421 Lux (bei 203 cm Screen)

Contrast

400:1 full on/off

400:1 full on/off

Black Level

3,2500 min. Lumen

1.061 min. Lumen

Offset

Resolution

XGA 1024 x 768

786.432 Pixel

Video Modes

SXGA 1280 x 1024 compressed

NTSC,PAL,SECAM

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Small screen width, rooms with very little ambient light below 100 lumens.

Light Source

160W Lamp

Articel Nr.: TLPL55

Light Life

1500 h.

Operating Costs

-

Focus

Manual

Zoom

Manual 1,2

Objective

F=1,8 f=14,5-17,4 mm

Throw Ratio

1,02-1,22:1

Audio

-

Connections

D-sub 15pin in und Ausgang

Cinch Video in

S-Video

2 x Audio

RS232C

Ceiling Mounting

Yes

Power


-

Size WxHxD

260 x 95,5 x 352 mm (10,2"x3,8"x13,9") 8,69 L/dm³

Operating Noise

-

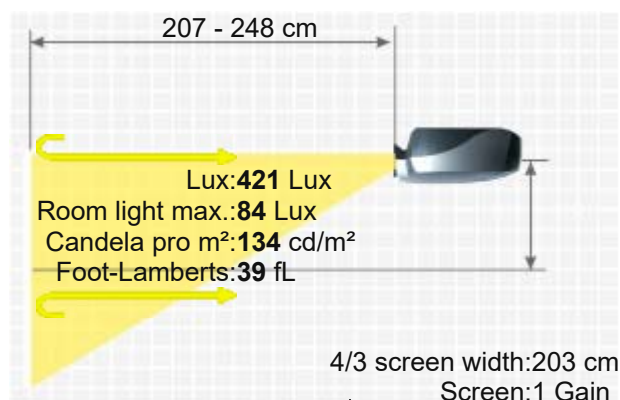

Key: 55 cm

Weight 3,90 kg / 8,6 lbs.
Keystone Vert.: +/-15°
Illumination -
Frequenz -
Foot-Lamberts 39 fL / max. 314 cm screen width
134 cd/m²

- Features
- Kensington Slot
 - Picture-in-Picture
 - Camera: 1/3 " CCD, 810,000 pixels, 500 TV lines, F=2.8/f=6.2 mm, manual focus

Lamp ruby	Ruby-LMP4091
Lamp original	TLPL55
Optional Compatible lamp	LMP-K4091
Universal Remote original	Fernb-uni-V3

Status Order here: <https://www.hcinema.de/lampen/shop-en.php?id=d4113>
- Discontinued (EOL) // Last update of the data: 2023-08-04



More Details



HCinema

<https://www.projector-database.com/pro/toshibatlp561-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.