

Roly RL-E6U



ROLY



LASER

Brief Introduction

Beta 2.5

manufacturer Roly offers the RL-E6U, an LCD laser projector with WUXGA 1920 x 1200 resolution and a contrast of 5000000:1. The laser light source has a lifespan of 20000 hours, which is over 13.7 years with a daily viewing time of 4 hours. The integrated horizontal and vertical keystone correction allows for freedom when setting up the projector. A picture width of up to 800 cm is possible. If the picture width is smaller (we recommend max. 533 cm), rooms with low light are no problem. Playing 1080P is also no problem for the projector, and so it can project Blu-rays even onto the ceiling with its 360° projection.



3 x 0,64" LCD Panel

WUXGA 16/9 Liquid Crystal Display

Display Type

Ansi-Lumen

6200

2756 Lux (bei 200 cm Screen)

Contrast

5000000: 1

5000000: 1

Black Level

0,0012 min. Lumen

0,001 min. Lumen

Offset

Resolution

WUXGA 1920 x 1200
2.304.000 Pixel

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, EDTV 480p, 576p

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Light Source

Laser Diode

Light Life

20000 h. / 30000 h. in Eco Mode

Operating Costs

0,00 € Laser

Focus

Manual

Zoom

Manual x1,6 + Digital Zoom

Objective

optional

Throw Ratio


optional

Audio

1 x 10W

Connections

2x HDMI in
D-sub 15pin in und out
Cinch Video in
Mini Jack Audio in und out
2x USB-A in
RS232C Din 9 pin in

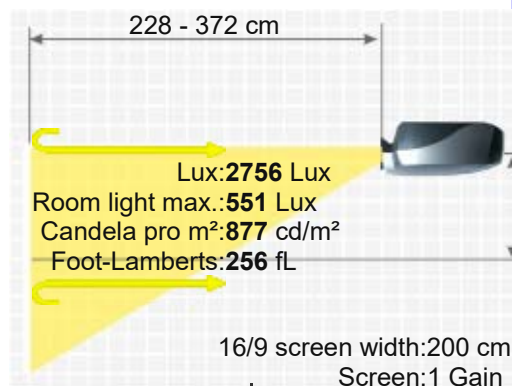

RJ45 in



Ceiling Mounting Yes
Power 380W
Size WxHxD 445 x 100 x 350 mm (17,5"x3,9"x13,8") 15,58 L/dm³
Operating Noise 38 / 32 dB in Eco Mode


Weight 7,10 kg / 15,43 lbs.
Keystone Vert.: +/-40°
Hori.: +/-15°
Illumination -

Frequenz H-sync: 15-90 kHz
V-sync: 50-80 Hz

Foot-Lamberts 256 fL / max. 800 cm screen width
877 cd/m²

Features

- Full HD 1080P compatible
- Eco Mode
- Kensington Slot
- High Dynamic Range (HDR)
- Warping
- 360° installable
- 24/7 continuous operation capable
- Password protection
- PJLink™
- Lan network compatible.
- Signal-triggered startup

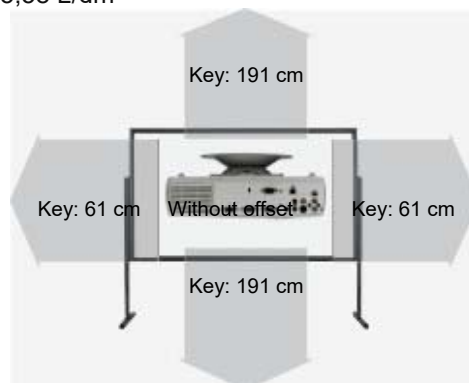

Optionaler Zubehör



Deckenhalterung Länge 100-120 mm

Halterung120

47,86 €

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
T68 Short Zoom Lens	0.68-0.8:1	1.4-1.6 m			Manual
Fix Optional Lenses					
T5 Short Fixed Lens	0.5:1	1 m			No Zoom
Status	2023 Current model // Last update of the data: 2025-02-24				

Data



More Details



HCinema

<https://www.projector-database.com/pro/rolyrle6u-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.