

Vertex XL 415



VERTEX XL 415



Brief Introduction

Beta 2.5

A brief introduction to the Vertex XL 415. The standard portable LCD projector has an XGA 1024 x 768 resolution and a contrast of 500:1. The projector can illuminate a screen width of up to 515 cm thanks to its 3500 Ansi lumens. The projector can create rooms with residual light with a smaller image width, max. 343 cm is recommended. This model is no longer offered by Vertex.



3 x 0,63" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

3500

500:1 full on/off

7,0000 min. Lumen

-

XGA 1024 x 768
786.432 Pixel

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

205W Lamp

2000 h. 3000 h. in eco Mode

-

Manual

Manual 1,2

F=2,2-2,6 f=23,6-28,3 mm

1,84-2,21:1

2Wx1

DVI-D x 1
Computer In D-Sub 15 Pin x 1
S-Video x 1
Composite Video x 1
Component Video x 1
Audio In RCA x 2

Ausgänge:
Computer Out D-Sub 15 Pin x 1
Control
USB x 1
RS232 x 1

-

-

295 x 85 x 220 mm (11,6"x3,3"x8,7") 5,52 L/dm³

-

2,90 kg / 6,39 lbs.

-


-

1167 Lux (bei 200 cm Screen)

500:1 full on/off

2,348 min. Lumen

-

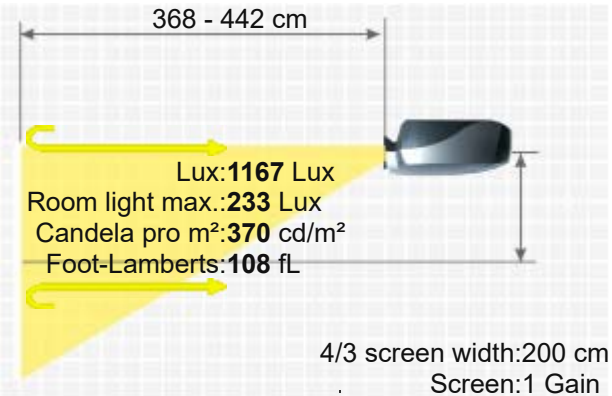

Frequenz	-
Foot-Lamberts	108 fL / max. 515 cm screen width
	370 cd/m²
Features	■ Eco Mode
Status	2007 Discontinued (EOL) // Last update of the data: 2023-08-04
Data	

More Details



HCinema

<https://www.projector-database.com/pro/vertexxl415-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.