ACTO DS110



Brief Introduction Beta 2.5	The DS110 3D DLP projector from ACTO has 2700 Ansi lumens, a contrast of 2600:1 and an SVGA 800 x 600 resolution. 2700 Ansi lumens ensure that an image width of 453 cm is also possible. However, if room light is available, the picture should be max. 302 cm wide. At only 30 decibels operating noise, the model is already very quiet compared to others. This model is no longer offered by ACTO.
Display Type	1 x 0,55" DLP Chip SVGA 4/3 Ti Digital Light Processing Chip
Ansi-Lumen	Projector: 2700 / Screen: 900 Lux (bei 200 cm Screen)
Contrast	Projector: 2600:1 full on/off / Screen: 2600:1 full on/off
Black Level	Projector: 1,0385 min. Lumen / Screen: 0,347 min. Lumen
Offset	-
Resolution	SVGA 800 x 600 480.000 Pixel SXGA 1280 x 1024 compressed
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p
3D Compatibility	Frame Sequential (3D Ready)
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Medium screen width or rooms with little light, max. 100 lumens.
Light Source	230W SHP Lamp
Light Life	3000 h. 4000 h. in Eco Mode
Operating Costs	-
Focus	Manual
Zoom	Manual 1,1
Objective	-
Throw Ratio	1,94-2,13:1
Audio	-
Connections	D-sub 15 pin in und out S-Video in Cinch Video in RS232C USB Typ B
Ceiling Mounting	Yes
Power	250W
Size WxHxD	264 x 78 x 208 mm (10,4"x3,1"x8,2") 4,28 L/dm³
Operating Noise	30dB
Weight	2,20 kg / 4,85 lbs.
Keystone	Vert.: +/-30°
Illumination	85%
Frequenz	H-sync: 15-110 kHz V-sync: 50-80 Hz
Foot-Lamberts	84 fL / max. 453 cm screen width

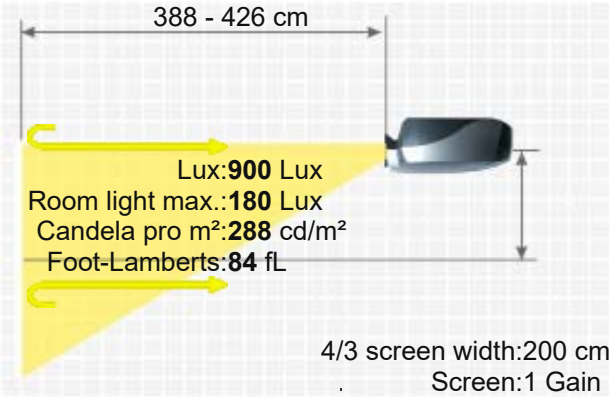



ACTO DS110



288 cd/m²

Features
- Eco Mode
- 6-segment colour wheel.

Status Data
- Discontinued (EOL) // Last update of the data: 2023-08-04

More Details

https://www.projector-database.com/pro/actods110-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.