
ACTO RAC100



3LCD | Kurzdistanz | Netzwerk | USB

Brief Introduction Beta 2.5	A brief introduction to the ACTO RAC100. The LCD projector has an XGA 1024 x 768 resolution and a contrast of 3200:1. The lamp life of the projector is specified as 4000 hours, which is over 5.5 years with a daily viewing time of 2 hours. This projector has a projection ratio of just 0.33:1. For a 2 m wide image, the projector only needs to be 66 cm away from the screen. On the market since 2013, the model is no longer offered by the manufacturer ACTO.
Display Type	3 x 0,63" LCD TFT Panel XGA 4/3 Liquid Crystal Display
Projector: Ansi-Lumen	2700
Projector: Contrast	3200:1 full on/off
Projector: Black Level	0,8438 min. Lumen
Projector: Offset	-
Screen	900 Lux (bei 200 cm Screen)
Screen	3200:1 full on/off
Screen	0,282 min. Lumen
Resolution	XGA 1024 x 768 786.432 Pixel
Video Modes	Pal, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p
Disc Recognition	DVD | HD Blu-ray (komprimiert) | ~~3D Blu-ray~~ | ~~4K UHD Blu-ray~~
Application	Short Distance | Medium screen width or rooms with little light, max. 100 lumens.
Light Source	245W UHP Lamp
Light Life	4000 h. 6000 h. in Eco Mode
Operating Costs	-
Focus	Manual
Zoom	No Zoom
Objective	F=1,8 f=4,21mm
Throw Ratio	0,33:1
Audio	10W Mono
Connections	HDMI D-sub 15pin in und out YUV in Cinch Video in Cinch Stereo in S-Video in Mini Jack Audio in und out USB Typ B RS232C Din 9 pin in RJ45 in
Ceiling Mounting	Yes
Power	300W
Size WxHxD	420 x 110 x 345 mm (16,5"x4,3"x13,6") 15,94 L/dm³
Operating Noise	36dB
Weight	5,00 kg / 11,02 lbs.
Keystone	Vert.: +/-5°
Illumination	75%



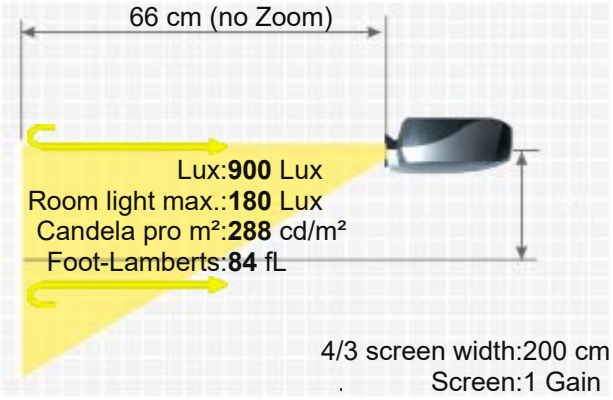

ACTO RAC100

Frequenz	H-sync: 15-100 kHz V-sync: 48-85 Hz
Foot-Lamberts	84 fL / max. 453 cm screen width
	288 cd/m²
Features	■ Eco Mode ■ Lan network compatible. ■ Short-throw projector
Status	2013 Discontinued (EOL) // Last update of the data: 2023-08-04
Data	



More Details

HCinema

https://www.projector-database.com/pro/actorac100-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.