

HOME CINEMA PROJECTOR

W1100

FULL HD-1080P



Features

- Native Full HD 1080p (1920 x 1080)
- 2000 ANSI Lumens, 4500:1 Contrast Ratio
- SRS WOW HD™, Built-In 20W Speaker
- Auto Keystone, Closed Captioning
- Variable Audio Out, Dual HDMI inputs

Top / Front View




Top



Front

Input and Output Terminals

Back

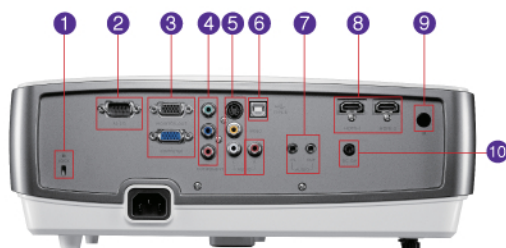

- | | |
|---------------------------|-------------------|
| 1 Security Lock | 6 USB Mini-B x1 |
| 2 RS-232 x1 | 7 Audio In/Out x1 |
| 3 RGB In/Out x1 | 8 HDMI x2 |
| 4 Component (RGB) x1 | 9 IR x1 |
| 5 S-Video/Video/Audio L/R | 10 12V Trigger x1 |

Specifications

HOME CINEMA

Native Resolution	1080p (1920 x 1080)
Brightness	2000 ANSI Lumens
Contrast Ratio	4500:1 (Full on/Full off)
Keystone	Auto Keystone; Manual Vertical +/- 20 Degree
Aspect Ratio	16:9 Native, 5 Aspect Ratio Selectable
Color	Full 1.07 Billion color palette
Zoom Ratio	1.5:1
Image Size (Diagonal)	24" - 300"
Throw Ratio	1.4 to 2.1 (65" @ 6.5 Feet)
Lamp Life	230W, 2500/4000 hours (Normal/Eco-Mode)
PC Compatibility	VGA (640 x 480) to WUXGA (1920 x 1200)
HDTV Compatibility	480i, 480p, 576i, 576p, 720p, 1080i, 1080p
Video Compatibility	NTSC, PAL, SECAM
Horizontal Frequency	31-90 kHz
Vertical Scan Rate	50-85 Hz
Input Terminals PC/AV	Analog RGB/Component: D-Sub 15 Pin x1 HDMI (v1.3) x2 Component Video: RCA x3 S-Video: Mini Din 4 Pin x1 Composite Video: RCA x1 Audio L/R: RCA x2 Stereo Mini-Jack x1
Output Terminals PC/AV	Monitor Out: D-Sub 15 Pin x1 Variable Audio Out: Stereo Mini-Jack x1 Speaker: 10W x2 12V Trigger x1
Control Terminals	Serial Connector: RS-232 9 Pin x1 USB Connector: USB Type B x1 (for service only)
Dimensions (W x H x D)	13.3" x 5.5" x 10.2"
Weight	7.9 lbs (3.6 kg)
Power Supply	100 to 240 VAC, 50/60 Hz
Power Consumption	Typical 290W, Standby <1W
Noise Level	27/22 dBA (Normal/Eco-Model)
Display Languages	Bulgarian/Croatian/Czech/Danish/Dutch/English/French/German/Greek/Hungarian/Italian/Indonesian/Japanese/Korean/Norwegian/Polish/Portuguese/Romanian/Russian/Simplified Chinese/Spanish/Swedish/Turkish/Thai/Traditional Chinese
Picture Mode	Cinema Mode/Standard mode/Dynamic Mode/User 1 Mode/User 2 Mode/User 3 Mode
Functions	BrilliantColor™/PIP/3D Color Management/Dual HDMI Inputs/Closed Caption/Auto Keystone/Variable Audio Out/Quick Auto Search/SRS WOW HD™/Blank/Auto-Off/Security Password/HDTV Compatible/High Altitude Mode
Accessories (Standard)	Quick Start Guide/Manual CD/Remote Control with backlight/VGA Cable/Power Cord/Battery
Accessories (Optional)	Ceiling Mount/Spare Lamp Kit
Lamp P/N	5J4G05.001
Limited Warranty	1-Year Parts & Labor / 180-days or 500 hours of lamp life

BenQ is a registered trademark of BenQ Corp. DLP® is a registered trademark of Texas Instruments. All rights reserved. Corporate and trademarks are the property of their respective companies. Specifications subject to change without notice.

