

Christie D4K25

CHRISTIE D4K25



A brief introduction to the D4K25: The Christie E-Cinema 3D DLP projector offers 22500 Ansi-Lumen, a contrast of 2000:1 and a UHD (4K+2K) 4096 x 2160 resolution. With the lens shift function, the projector can be positioned very freely. The projector can illuminate a picture width of 1382 cm well. The projector can create rooms with residual light with a smaller image width, we recommend a maximum of 921 cm here. Furthermore, it is Full HD 1080P and 4K as well as 3D compatible, meaning that all currently available Blu-ray formats can be recognized by the projector. It was launched in 2012 and is no longer offered by the manufacturer Christie, but is still one of the most popular projectors.

Brief Introduction

Beta 2.5

Display Type

3 x 1,38" DLP Chip
UHD 19/10 Ti Digital Light Processing Chip

Ansi-Lumen

22500 / bei 3kW Lampe 10667 Lux (bei 200 cm Screen)

Contrast

2000:1 full on/off 2000:1 full on/off

Black Level

11,2500 min. Lumen 5,339 min. Lumen

Lens shift

Vert.: +/-50% Hori.: +/-20%

Resolution

UHD (4K+2K) 4096 x 2160
8.847.360 Pixel

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD, 3D, EDTV 480p, 576p

3D Compatibility

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom
Frame Sequential (3D Ready)

Application

E-Cinema | Digital Cinema (D-Cinema) in the movie theater.
Very large screen width and rooms with plenty of light and shaded daylight.

Light Source

3.0kW CDXL-30SD / 3.0kW CDXL-30 /
2.0kW CDXL- Lampe

Light Life

Article Nr.: 003-000598-02
1500 h. / 2500 h. / 3500 h.

Operating Costs

-

Focus

Powered

Zoom

Powered

Objective

optional

Throw Ratio


optional

Audio

Nein

Connections

2x 3G HD-SDI on board
2x 3G HD-SDI input card
2x HDMI 1.3 on board (physical DVI connectors)

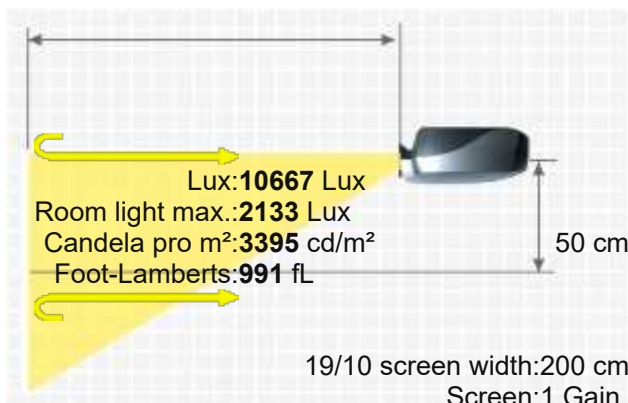

Ceiling Mounting -
Power -
Size WxHxD 1298 x 483 x 648 mm (51,1"x19"x25,5") 406,25 L/dm³
Operating Noise -


Weight 114,00 kg / 251,33 lbs.
Keystone -
Illumination -

Frequenz -

Foot-Lamberts 991 fL / max. 1382 cm screen width
3395 cd/m²

- Real Full HD 3D
- Full HD 1080P compatible
- Lens shift Funktion
- Lan network compatible.

Screen Mirroring -

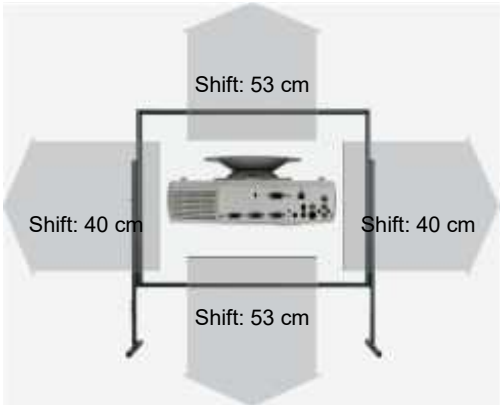

Optional accessories

	CDXL-20 Nackte Lampe (2000W) Original	003-000598-02	EOL €
	Luftfilter f?r FI?ssigkeitsk?hlradiator Original	003-003082-01	75,27 €

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
5.43:1-7.69:1	5.43-7.69:1	10.9-15.4 m	+/-56%	+/-19%	Powered
3.89-5.43:1	3.89-5.43:1	7.8-10.9 m	+/-13%	+/-4%	
2.71-3.89:1	2.71-3.89:1	5.4-7.8 m	+/-13%	+/-4%	Powered
1.98-2.71:1	1.98-2.71:1	4-5.4 m	+/-13%	+/-4%	Powered
1.63-2.17:1	1.63-2.17:1	3.3-4.3 m	+/-13%	+/-4%	Powered
1.31-1.63:1	1.31-1.63:1	2.6-3.3 m	+/-13%	+/-4%	
1.13-1.31:1	1.13-1.31:1	2.3-2.6 m	+/-56%	+/-19%	Powered
Fix Optional Lenses					
1.0:1	1:1	2 m	+/-29%	+/-9%	No Zoom
0.72:1	0.72:1	1.4 m	0.0% Fix		No Zoom

Status 2012 Discontinued (EOL) // Last update of the data: 2025-03-03

Data



More Details



HCinema

<https://www.projector-database.com/pro/christied4k25-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.