

Digital Projection E-VISION WXGA 6000



With the E-VISION WXGA 6000, manufacturer Digital Projection offers a large-format DLP projector with WXGA 1280 x 800 resolution and a contrast of 2400:1. The projector can illuminate images up to 787 cm wide thanks to its 6000 Ansi lumens. The projector can create rooms with residual light with a smaller image width, we recommend a maximum of 525 cm. The projector can also play 1080P without any problems. On the market since 2012, the model is no longer offered by the manufacturer Digital Projection.

 1 x 0,65 " DLP Chip
WXGA 16/10 Ti Digital Light Processing Chip

Brief Introduction

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Projector	6000	2400 Lux (bei 200 cm Screen)
	2400:1 full on/off	2400:1 full on/off
Screen	2,5000 min. Lumen	1,001 min. Lumen

WXGA 1280 x 800
1.024.000 Pixel

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, EDTV 480p, 576p

Event | Very large screen width and rooms with plenty of light and shaded daylight.

2 x 280W Lamp

Articel Nr.: 110-284

2000 h. 3000 h. in Eco Mode

5,47% / 0,35 €

Powered


Powered

optional

optional

-

HDMI in
DVI in
D-sub 15pin in und out
Cinch Video in
Cinch Stereo in
S-Video in
Mini Jack Audio in und out
USB in
RS232C Din 9 pin in
RJ45 in

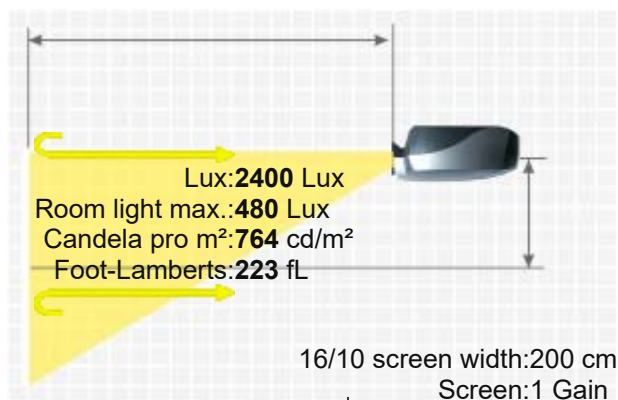

Ceiling Mounting	12V Trigger out
Power	Yes
Size WxHxD	715W
Operating Noise	505 x 208 x 385 mm (19,9"x8,2"x15,2") 40,44 L/dm³
	39 / 34 dB in Eco Mode

Weight	20,50 kg / 45,19 lbs.
Keystone	-
Illumination	-
Frequenz	-

Foot-Lamberts	223 fL / max. 787 cm screen width
	764 cd/m²

- Features
- Full HD 1080P compatible
 - Eco Mode
 - Kensington Slot
 - PJLink™
 - Optional Wi-Fi network compatible.
 - Lan network compatible.

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
112-504	5.53-8.74:1	11.1-17.5 m	50%	+/-10%	Powered
112-503	3.74-5.67:1	7.5-11.3 m	50%	+/-10%	Powered
112-502	2.32-3.89:1	4.6-7.8 m	50%	+/-10%	Powered
112-501	1.8-2.38:1	3.6-4.8 m	50%	+/-10%	Powered
112-500	1.31-1.88:1	2.6-3.8 m	50%	+/-10%	Powered
Fix Optional Lenses					
112-499	0.8:1	1.6 m			No Zoom

Status 2012 Discontinued (EOL) // Last update of the data: 2023-08-04
Data Created: 2021-05-20 11:55:15

More Details



HCinema
<https://www.projector-database.com/pro/digitalprojectionevisionwxga6000-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.