

Digital Projection Titan Super Quad 40



The Digital Projection Titan Super Quad 40 3D DLP projector has 40000 Ansi lumens, a contrast of 2000:1 and a WUXGA 1920 x 1200 resolution. With the lens shift function, the projector can be positioned very freely. The projector can illuminate an image width of 2032 cm well. Rooms with residual light can be created by the projector with a smaller image width, max. 1355 cm is recommended here. In the event that the image is still too small, the projector offers integrated edge blending software, which allows several projectors to project a large image together. Video signals 1080P and 3D are also no problem for the projector. The model built in 2015 is no longer offered by Digital Projection, but is still one of the most popular projectors.



2 x 3 x 0,96" DLP Chip

WUXGA 16/9 Ti Digital Light Processing Chip

Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

3D Compatibility

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Projector

40000

2000:1 full on/off

20,0000 min. Lumen

Vert.: +56,7% -45% Hori.: +/-18,8%

WUXGA 1920 x 1200

2.304.000 Pixel

WUXGA 1920 x 1200 compressed

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom

Frame Sequential (3D Ready)

Event | Very large screen width and rooms with plenty of light and shaded daylight.

8 x 465W Lamp

Article Nr.: 113-628 / 113-714 / 113-715

1500 h.

-

Powered

Powered

optional

optional

Nein

HDMI 1.3 in

DVI-D in

D-sub 15 pin in

5 x BNC RGBHV in

BNC Video in

3G-SDI in

USB Typ B

RS232C Din 9 pin in

RJ45 in

3D Sync in und out

Yes, is possible.

2400W


585 x 258 x 688 mm (23"x10,2"x27,1") 103,84 L/dm³

Screen

17778 Lux (bei 200 cm Screen)


2000:1 full on/off

8,899 min. Lumen

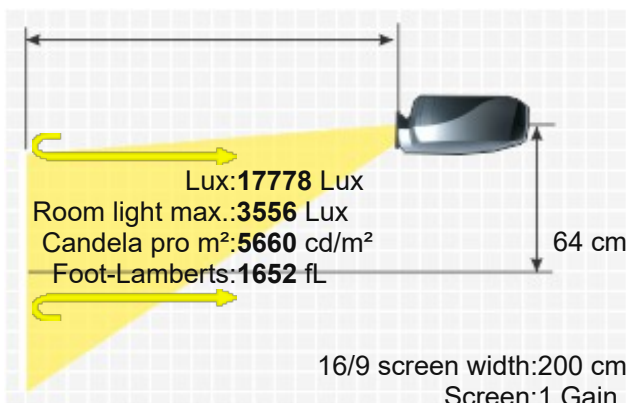

Operating Noise 48dB

Weight 39,00 kg / 85,98 lbs.
Keystone -
Illumination -
Frequenz H-sync: 15-100 kHz
V-sync: 24-85 Hz
Range max.: 170 MHz
Foot-Lamberts 1652 fL / max. 2032 cm screen width
5660 cd/m²
Features
■ Real Full HD 3D
■ Full HD 1080P compatible
■ Lens shift Funktion
■ Eco Mode
■ Edge Blending
■ Picture-in-Picture
■ Lan network compatible.
Screen Mirroring -

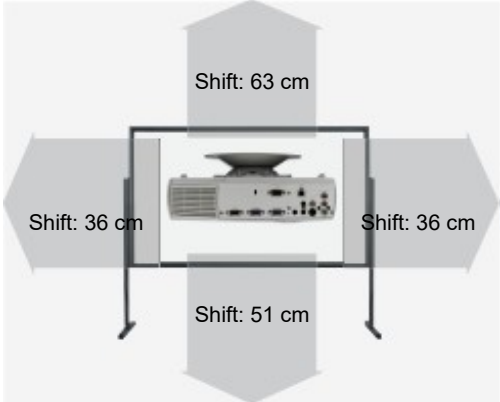

Optional accessories

	Einzel Lampe Ruby	Ruby-LMP23671	325,33 €
	4-er Pack Lampe inkl. Luftfilter Original	113-715	EOL €
	Einzel Lampe inkl. Luftfilter Original	113-628	1.190,30 €
	Doppel Lampe inkl. Luftfilter Original	113-714	2.472,31 €
	Deckenhalterung	HeavyDuty	378,28 €

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
109-236	1.16-1.49:1	2.3-3 m	+/-40.8%	+/-18.8%	Powered
109-235	6.92-10.36:1	13.8-20.7 m	56.7-45%	+/-18.8%	Powered
105-613	4.16-6.96:1	8.3-13.9 m	68.5-45%	+/-18.8%	
105-612	2.56-4.16:1	5.1-8.3 m	56.7-45%	+/-18.8%	
105-610	1.87-2.56:1	3.7-5.1 m	56.7-45%	+/-18.8%	Powered
105-610	1.39-1.87:1	2.8-3.7 m	56.7-45%	+/-18.8%	Powered
Fix Optional Lenses					
105-609	1.12:1	2.2 m	68.5-50%	+/-18.8%	No Zoom
105-608	1.12:1	2.2 m	56.7-45%	+/-18.8%	
105-607	0.67:1	1.3 m	+/-10.8%	+/-4.4%	No Zoom

Status 2015 Discontinued (EOL) // Last update of the data: 2025-03-03
Data Created: 2015-08-14 13:14:45

More Details



HCinema

<https://www.projector-database.com/pro/digitalprojectiontitansuperauad40-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice.
HCinema is not responsible for any errors or omissions contained in product descriptions.