

Dukane ImagePro 8065

DUKANE IMAGEPRO 8065



Brief Introduction

Beta 2.5

With the ImagePro 8065, manufacturer Dukane offers an LCD projector with SVGA 800 x 600 resolution and a contrast of 400:1. An image width of up to 389 cm is possible. However, the image should be smaller in room light. We recommend max. 259 cm. The model built in 2005 is no longer offered by Dukane.

Display Type



3 x 0,6" LCD TFT Panel
SVGA 4/3 Liquid Crystal Display

Ansi-Lumen

2000 / 1600 im Eco Mode

667 Lux (bei 200 cm Screen)

Contrast

400:1 full on/off

400:1 full on/off

Black Level

5,0000 min. Lumen

1,68 min. Lumen

Offset

Resolution

SVGA 800 x 600

480.000 Pixel

Video Modes

UXGA 1600 x 1200 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with little light, max. 100 lumens.

Light Source

180W UHB Lamp

Articel Nr.: 456-8755D

Light Life

2000 h.

Operating Costs

-

Focus

Manual

Zoom

Manual 1,2

Objective

F=1,7-1,9 f=18,9-22,6 mm

Throw Ratio

1,52-1,86:1

Audio

1W

Connections

D-sub 15 pin in und out

YUV in


S-Video in

Cinch Video in

Cinch Stereo in

USB

Mini Jack in und out

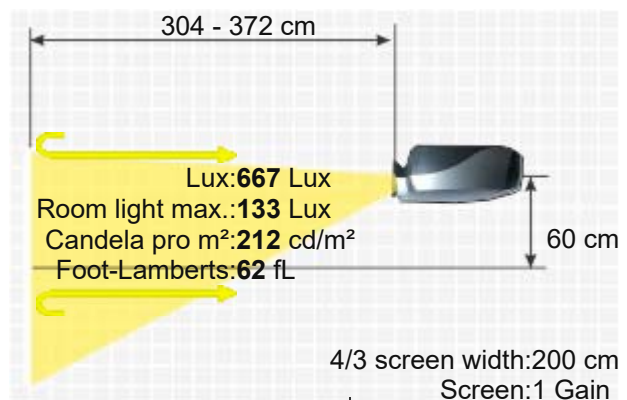



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
290W
304,8 x 86,36 x 248,9 mm (12"x3,4"x9,8") 6,48 L/dm³
38 / 33 dB in Eco Mode

Weight
Keystone
Illumination

2,80 kg / 6,17 lbs.
Vert.: +/-15°
-

Frequenz

H-sync: 15-106 kHz
V-sync: 50-120 Hz

Foot-Lamberts

62 fL / max. 389 cm screen width
212 cd/m²


- Freeze
- User logo
- Eco Mode
- Kensington Slot
- Password protection
- Remote control with mouse control
- Gamma correction

Features

Status

2005 Discontinued (EOL) // Last update of the data: 2023-08-04

Data

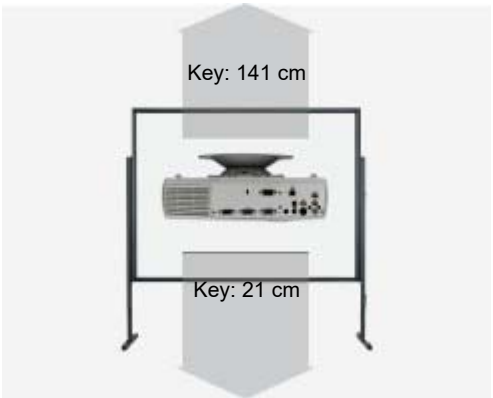

More Details



HCinema

<https://www.projector-database.com/pro/dukaneimagepro8065-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.