

InFocus IN5132

INFOCUS IN5132



Brief Introduction

Beta 2.5

The stationary InFocus IN5132 LCD projector has 5000 Ansi lumens, a contrast of 3000:1 and an XGA 1024 x 768 resolution. Includes an integrated media player for direct playback of files. The integrated lens shift gives freedom when positioning the projector. An image width of up to 616 cm is possible as the projector has 5000 Ansi lumens. The projector creates rooms with residual light with a smaller image width, max. 411 cm is recommended. Furthermore, the projector can play 1080P without any problems. The model built in 2012 is no longer offered by InFocus.

Display Type



3 x LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Ansi-Lumen

5000 / 4000 im Eco Mode

1667 Lux (bei 200 cm Screen)

Contrast

3000:1 full on/off

3000:1 full on/off

Black Level

1,6667 min. Lumen

0,556 min. Lumen

Lens shift

Vert.: +50% -12,5% Hori.: +/-10%

Resolution

XGA 1024 x 768

786.432 Pixel

WUXGA 1920 x 1200 compressed

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Media player formats: JPEG (.jpeg, .jpg) Bitmap (.bmp) PNG (.png) GIF (.gif) Movie (.avi, .mov)

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Wide screen width or rooms with plenty of light (over 200 lumens).

Light Source

245 / 170W im Eco Mode Lamp

Light Life

Articel Nr.: SP-LAMP-080

2500 h. 4000 h. in Eco Mode

Operating Costs

3,35% / 0,11 €

Focus

Powered

Zoom

Powered 1,47

Objective

F=1,6-2,0 f=19-29 mm

Throw Ratio

1,5-2,2:1

Audio

2 x 8W

Connections

2 x HDMI 1.4 in


D-sub 15 pin in und out

5 x BNC RGBHV in

YUV in

S-Video in

Cinch Video in

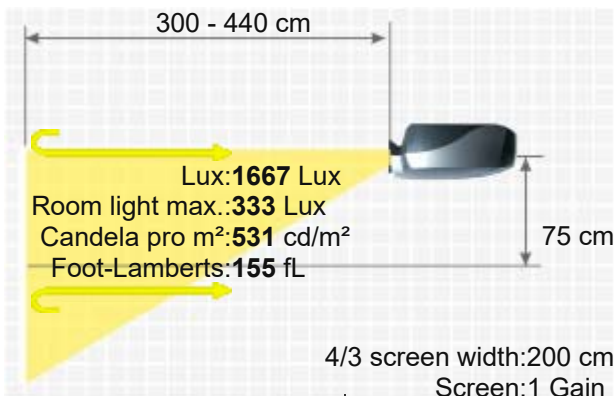

USB Typ A, B in

Mini Jack Audio in und out

RJ45 in

RS232C

Ceiling Mounting

Power

Size WxHxD

Operating Noise

Yes

375W

498 x 147 x 476 mm (19,6"x5,8"x18,7") 34,85 L/dm³

35 / 29 dB in Eco Mode

Weight

Keystone

Illumination

Frequenz

Foot-Lamberts

Features

8,40 kg / 17,64 lbs.

Vert.: +/-35°
Hori.: +/-35°

-

H-sync: 31,5-106 kHz
V-sync: 56-120 Hz

155 fL / max. 616 cm screen width
531 cd/m²

■ Full HD 1080P compatible

■ Lens shift Funktion

■ Integrated Mediaplayer

■ Eco Mode

■ Kensington Slot

■ Dynamic iris

■ 24/7 continuous operation capable

■ PJLink™

■ Lan network compatible.

■ Crestron®-Software compatible.

■ DICOM Mode

Optional

Lamp original

Air filter original

Object lens original

Object lens original

Object lens original

Object lens original

Object lens original

Object lens original

Remote control original

SP-LAMP-080

MU06642 / SP-FLITER-02

LENS-073

LENS-072

LENS-071


LENS-070

LENS-069

INFOCUS-IN5132

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=21001>

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
LENS-073	4.9-8.3:1	9.8-16.6 m	50-12.5%	+/-10%	Powered
LENS-072	2.8-4.9:1	5.6-9.8 m	50-12.5%	+/-10%	Powered
LENS-071	1.5-3:1	3-6 m	50-12.5%	+/-10%	Powered
LENS-070	1.5-2.2:1	3-4.4 m	50-12.5%	+/-10%	Powered
Fix Optional Lenses					
LENS-069	0.8:1	1.6 m	0.0% Fix		No Zoom
Status	2012 Discontinued (EOL) // Last update of the data: 2023-08-30				

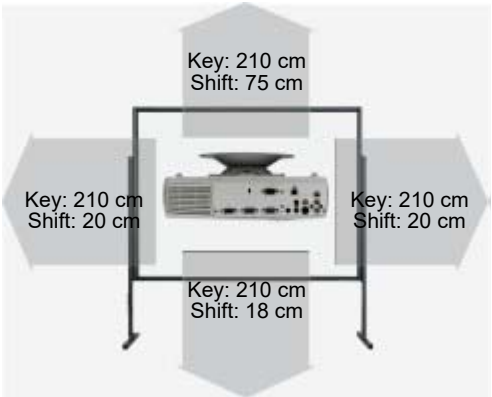



HCinema

<https://www.projector-database.com/pro/infocusin5132-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.