

Liesegang ddv 2100

LIESEGGANG DDV 2100



The standard portable Liesegang ddv 2100 DLP projector has 2100 Ansi lumens, a contrast of 2000:1 and an XGA 1024 x 768 resolution. An image width of up to 399 cm is possible. However, the image should be smaller in room light. We recommend max. 266 cm. The model built in 2006 is no longer offered by Liesegang. It should also be noted that there are unfortunately no longer any replacement lamps available for the projector, neither originals nor replicas.

Brief Introduction

Beta 2.5

Display Type



1 x 0,55" DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

2100 / 1600 im Eco Mode

679 Lux (bei 203 cm Screen)

Contrast

2000:1 full on/off

2000:1 full on/off

Black Level

1,0500 min. Lumen

0.34 min. Lumen

Offset

-

Resolution

XGA 1024 x 768

786.432 Pixel

Video Modes

SXGA 1280 x 1024 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with little light, max. 100 lumens.

Light Source

200W UHB Lamp

Articel Nr.: ZU 1213 04 4010

Light Life

2000 h.

Operating Costs

-

Focus

Manual

Zoom

Manual 1,2

Objective

f=18-21,5 mm

Throw Ratio

1,61-1,92:1

Audio

1 x 2W

Connections

D-sub 15pin in

S-Video in

Cinch Video in


USB in

Mini Jack in



Ceiling Mounting

Yes

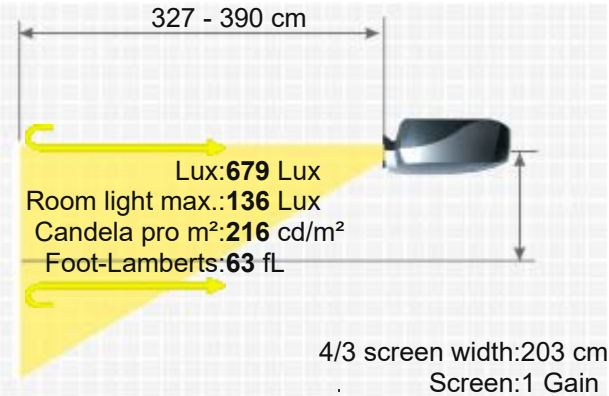


Power 250W / 5W standby
Size WxHxD 200 x 88 x 256 mm (7,9"x3,5"x10,1") 4,51 L/dm³
Operating Noise 33 / 29 dB in Eco Mode

Weight 2,20 kg / 4,85 lbs.
Keystone Vert.: +/-15°
Illumination 80%
H-sync: 15-79 kHz
Frequenz V-sync: 50-85 Hz
Range max.: 100 MHz
Foot-Lamberts 63 fL / max. 399 cm screen width
216 cd/m²

- Features
- Eco Mode
 - Kensington Slot
 - Gamma correction
 -

Please note Kalkulationstabelle und Projektionsverhältnis-Angabe im Prospekt stimmen nicht.
Status 2006 Discontinued (EOL) // Last update of the data: 2023-08-04

Data

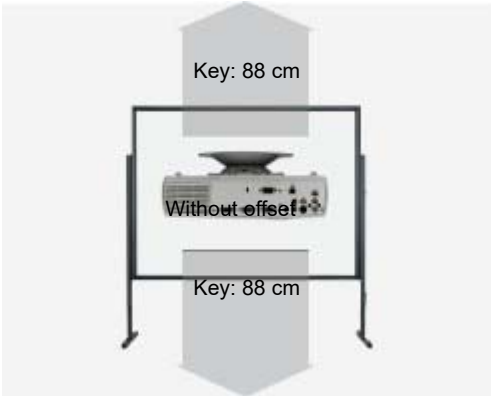

More Details



HCinema

<https://www.projector-database.com/pro/liesegangddv2100-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.