



Norxe 10 4K

NORXE 10 4K



Display Type	 1 x DLP Panel HDTV 16/9 Ti Digital Light Processing Chip	
Ansi-Lumen	3000	Screen 1333 Lux (bei 200 cm Screen)
Contrast	1600-10000:1	1600-10000:1
Black Level	0,3000 min. Lumen	0,833 min. Lumen
Offset	-	
Resolution	UHD (4K2K) 3840 x 2160 8.294.400 Pixel / FHD E-Shift	
Video Modes	Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD, EDTV 480p, 576p	
3D Compatibility	Side-by-Side Top-and-Bottom	
Application	Stationary Permanent installation in the training room and meeting room as well as the conference room. Medium screen width or rooms with a little more ambient light, max. 200 lumens.	
Light Source	SSI,NXL® (+ optional IR LED)	
Light Life	100000 h. to 50%	
Operating Costs	0,00 € LED	
Focus	Powered	
Zoom	Powered	
Objective	optional	
Throw Ratio	optional	
Audio	No	
Connections	2x DisplayPort 1.4 HDMI 2.0 in 2x BNC (sync/trigger) 1x Mini DIN USB in RJ45 in	
Ceiling Mounting	Yes	
Power	325W	
Size WxHxD	485 x 216,75 x 405 mm (19,1"x8,5"x15,9") 42,43 L/dm³	
Operating Noise	32dB	

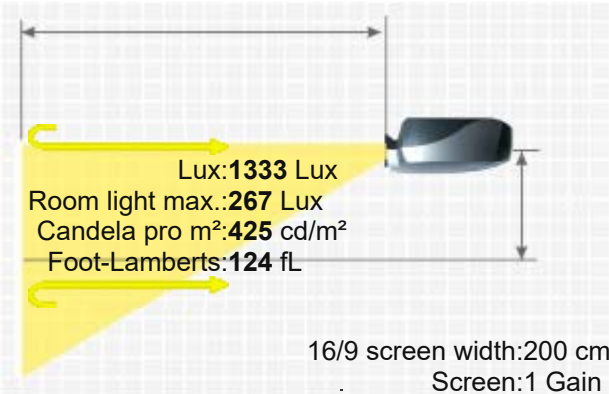

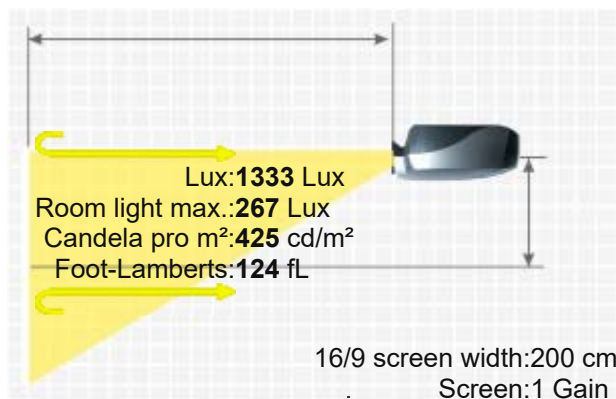

Weight	18,50 kg / 39,68 lbs.
Keystone	-
Illumination	-

Frequenz

-

Foot-Lamberts

124 fL / max. 556 cm screen width

425 cd/m²

Features

- Full HD 1080P compatible
- Warping
- 24/7 continuous operation capable
- Password protection
- Lan network compatible.
- Unify™ electronics platform

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
N4	1.35-2.27:1	2.7-4.5 m	+/-104%	+/-75.8%	Powered
N2	1.05-1.4:1	2.1-2.8 m	+/-116%	+/-75%	Powered
N1	0.7-1.09:1	1.4-2.2 m	+/-53%	+/-51%	Powered
Fix Optional Lenses					
N3	0.55:1	1.1 m	+/-87%	+/-63%	No Zoom

Status 2024 Current model // Last update of the data: 2024-08-27

Data



More Details



HCinema

<https://www.projector-database.com/pro/norxe104k-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.