

Optoma TX7855

EAN/UPC:796435 41 74 9

OPTOMA TX7855



The Optoma TX7855 3D BrilliantColor DLP projector has 4800 Ansi lumens, a contrast of 2000:1 and an XGA 1024 x 768 resolution. The integrated lens shift gives you freedom when positioning the projector. The projector can illuminate an image width of up to 603 cm thanks to its 4800 Ansi lumens. The projector can create rooms with residual light with a smaller image width, we recommend a maximum of 402 cm. It is also Full HD 1080P compatible. On the market since 2010, the model is no longer offered by the manufacturer Optoma, but is still very popular in our projector database.

Brief Introduction

Beta 2.5

Display Type

1 x 0,7" DC3 DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

4800

1600 Lux (bei 200 cm Screen)

Contrast

2000:1 full on/off

2000:1 full on/off

Black Level

2,4000 min. Lumen

0,801 min. Lumen

Lens shift

Vert.: +50% -15% Hori.: +/-10%

Resolution

XGA 1024 x 768

786.432 Pixel

Video Modes

UXGA 1600 x 1200 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

3D Compatibility

Frame Sequential (3D Ready)

120Hz Frame Sequential 3D for Resolutions Up to 720p,
60Hz Field Sequential 3D for Resolutions Up to 480i

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Wide screen width or rooms with plenty of light (over 200 lumens).

Light Source

330W P-VIP Lamp

Articel Nr.: BL-FP330B

Light Life

2000 h. 3000 h. in Eco Mode

Operating Costs

5,79% / 0,19 €

Focus

Manual

Zoom

Manual 1,6

Objective

optional

Throw Ratio

optional

Audio

2 x 3W


Connections

HDMI

DVI-D

2 x D-sub 15 pin in 1 x out

5 x BNC RGBHV in

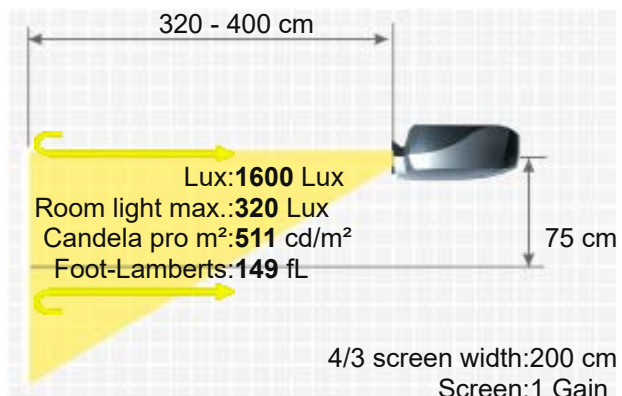

S-Video in
 Cinch Video in
 Mini Jack Audio in und out
 RS232C
 RJ45 in
 Ceiling Mounting Yes
 Power 430 / 390W in Eco Mode
 Size WxHxD 416 x 143 x 324 mm (16,4"x5,6"x12,8") 19,27 L/dm³
 Operating Noise 31dB

Weight 8,60 kg / 18,96 lbs.
 Keystone Vert.: +/-30°
 Illumination 85%


Frequenz H-sync: 15-91,1 kHz
 V-sync: 50-85 Hz

Foot-Lamberts 149 fL / max. 603 cm screen width
 511 cd/m²

- Full HD 1080P compatible
- Lens shift Funktion
- Eco Mode
- Kensington Slot
- Password protection
- BrilliantColor™
- Remote control with laser pointer
- Lan network compatible.
- Crestron®-Software compatible.

Features
 Bulb only Osram NLMP20003
 Lamp ruby Ruby-LMP20003
 Lamp original BL-FP330B / 5811116283-SOT / DE.5811116911-SOT
 Optional
 Compatible lamp LMP-K19835
 Universal Remote original Fernb-uni-V3
 Ceiling Mount 100-120 Halterung100

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n19838>

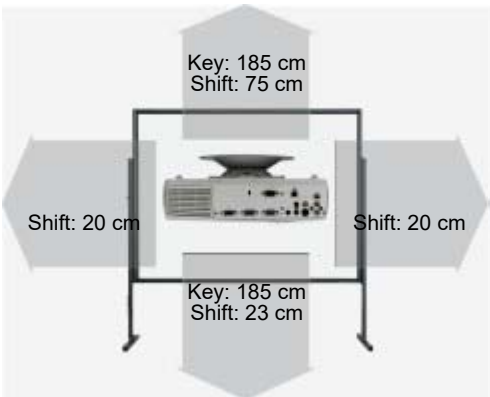

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
STD Lens: 1.6 ~ 2.0:1,	1.6-2:1	3.2-4 m	60-15%	+/-10%	Manual
Long Throw Lens: 2.0 ~ 3.0:1,	2-3:1	4-6 m	60-15%	+/-10%	Manual
Fix Optional Lenses					
Short Throw Lens: 0.8:1,	0.8:1	1.6 m	0.0% Fix		No Zoom

Status 2010 Discontinued (EOL) // Last update of the data: 2023-08-04
 Data

More Details



HCinema

<https://www.projector-database.com/pro/optomax7855-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.