

Panasonic PT-EX620 E/U/J/L

PANASONIC PT-EX620 E/U/J/L



The Panasonic PT-EX620 E/U/J/L stationary LCD projector has 6200 Ansi lumens, a contrast of 10000:1 and a WXGA 1280 x 800 resolution. The service life of the lamp is up to 4000 hours, which is equivalent to over 5.5 years at 2 hours of use. The integrated lens shift gives freedom when positioning the projector. 6200 Ansi lumens ensure that a picture width of 800 cm is also possible. The projector creates rooms with residual light with a smaller image width, we recommend a maximum of 533 cm. Furthermore, the projector can play 1080P without any problems. On the market since 2016, the model is no longer offered by the manufacturer Panasonic, but is still very popular in our projector database.



3 x 0,63" LCD TFT Panel
WXGA 16/10 Liquid Crystal Display

Brief Introduction Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Projector 6200

10000:1 full on/off

0,6200 min. Lumen

Vert.: +/-50% Hori.: +/-30%

WXGA 1280 x 800

1.024.000 Pixel

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very large screen width and rooms with plenty of light and shaded daylight.

320W UHM Lamp

Articel Nr.: ET-LAEF100

4000 h. 5000 h. in Eco Mode

2,44% / 0,08 €

Powered

Powered 1,85

F=1,6-2,2 f=17,1-31,7 mm L / optional

1,32-2,44:1


10W

HDMI in
D-sub 15pin in und out
5 x BNC RGBHV in
Cinch Video in
Cinch Stereo in

Screen 2480 Lux (bei 200 cm Screen)

10000:1 full on/off

0,248 min. Lumen

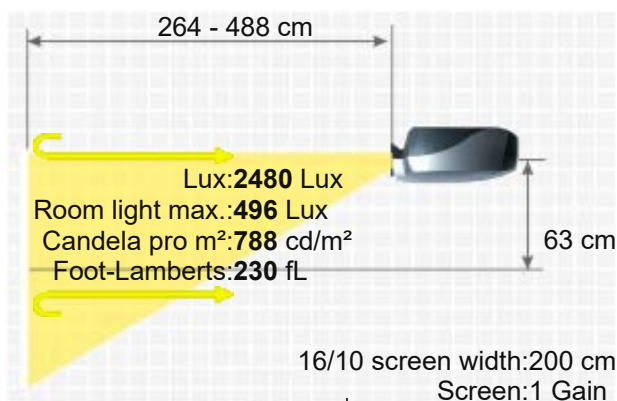

Ceiling Mounting
Power
Size WxHxD
Operating Noise

Mini Jack Audio in und out
USB Typ A in
RS232C Din 9 pin in
RJ45 DIGITAL LINK in
Yes
461 / 305W in Eco Mode
498 x 145 x 398,3 mm (19,6"x5,7"x15,7") 28,74 L/dm³
35 / 29 dB in Eco Mode

Weight
Keystone
Illumination
Frequenz
Foot-Lamberts

8,40 kg / 17,64 lbs.
Vert.: +/-35°
Hori.: +/-35°
90%
H-sync: 15-91 kHz
V-sync: 24-120 Hz
Range max.: 162 MHz
230 fL / max. 800 cm screen width
788 cd/m²

Features

- Full HD 1080P compatible
- Lens shift Funktion
- Eco Mode
- Dynamic iris
- PJLink™
- Optional Wi-Fi network compatible.
- Lan network compatible.
- DICOM simulation

Optional

Remote control original	N2QAYA000119 / N2QAYA000159
Air filter original	ET-RFE300
Ceiling bracket original	ET-PKD120S
Ceiling bracket original	ET-PKD120H
Lamp original	ET-LAEF100
Object lens original	ET-ELW31 / LNS-W31
Object lens original	ET-ELW30 / LNS-W30
Object lens original	ET-ELT30 / LNS-T30

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=fro23901>

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
ET-ELW31	0.79-1.08:1	1.6-2.2 m			Powered
ET-ELW30	1-1.3:1	2-2.6 m			Powered
ET-ELT30	4.36-7.68:1	8.7-15.4 m	+/-50%	+/-30%	Powered
ET-ELT30	2.39-4.36:1	4.8-8.7 m	+/-50%	+/-30%	Powered

Status

2016 Discontinued (EOL) // Last update of the data: 2024-07-04
Created: 2016-02-12 12:59:13



More Details



<https://www.projector-database.com/pro/panasonicptex620l-en.html>