

Panasonic PT-FW530

PANASONIC PT-FW530



The Panasonic PT-FW530 LCD projector has 4500 Ansi lumens, a contrast of 10000:1 and a WXGA 1280 x 800 resolution. The service life of the lamp is up to 6000 hours, which is over 8.2 years with a daily viewing time of 2 hours. The built-in lens shift and keystone correction function provides freedom when adjusting the projection. An image width of up to 682 cm is possible, if the image width is smaller (we recommend max. 455 cm), rooms with residual light are also no problem. On the market since 2016, the model is no longer offered by the manufacturer Panasonic, but is still a popular projector in our database.



3 x 0,64" LCD TFT Panel
WXGA 16/10 Liquid Crystal Display

Projector 4500
10000:1 full on/off
0,4500 min. Lumen
Screen 1800 Lux (bei 200 cm Screen)
10000:1 full on/off
0,18 min. Lumen

Vert.: +/-60% Hori.: +/-30%
WXGA 1280 x 800
1.024.000 Pixel

Pal, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Wide screen width or rooms with plenty of light (over 200 lumens).

270W UHM Lamp

Articel Nr.: ET-LAEF100

6000 h. 8000 h. in Eco Mode

1,52% / 0,05 €

Manual


Manual 1,85

F=1,6-2,2 f=17,1-31,7 mm

1,22-2,26:1

10W

HDMI in
D-sub 15pin in und out
Cinch Video in
Cinch Stereo in
Mini Jack Audio in und out
USB Typ A in
RS232C Din 9 pin in

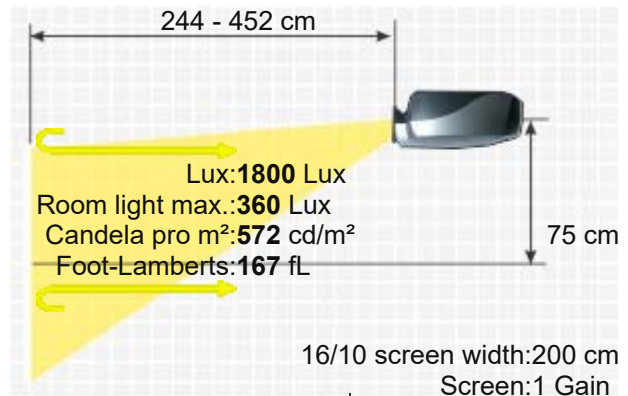

Brief Introduction
Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting
Power
Size WxHxD
Operating Noise

RJ45 mit DIGITAL LINK in
Yes
400W
498 x 145 x 398,3 mm (19,6"x5,7"x15,7") 28,74 L/dm³
33 / 29 dB in Eco Mode

Weight
Keystone
Illumination
Frequenz
Foot-Lamberts

9,00 kg / 19,84 lbs.
Vert.: +/-35°
Hori.: +/-35°
90%
H-sync: 15-91 kHz
V-sync: 24-120 Hz
Range max.: 162 MHz
167 fL / max. 682 cm screen width
572 cd/m²

Features

- Lens shift Funktion
- Eco Mode
- Dynamic iris
- PJLink™
- Lan network compatible.
- DICOM simulation

Optional

Remote control original	N2QAYA000123 / N2QAYA000162
Air filter original	ET-RFF200
Ceiling bracket original	ET-PKD120S
Ceiling bracket original	ET-PKD120H
Lamp original	ET-LAEF100

Status


Order here: <https://www.hcinema.de/lampen/shop-en.php?id=fro9001020>
2016 Discontinued (EOL) // Last update of the data: 2024-07-04
Created: 2016-02-12 13:14:57



More Details



<https://www.projector-database.com/pro/panasonicptfw530-en.html>

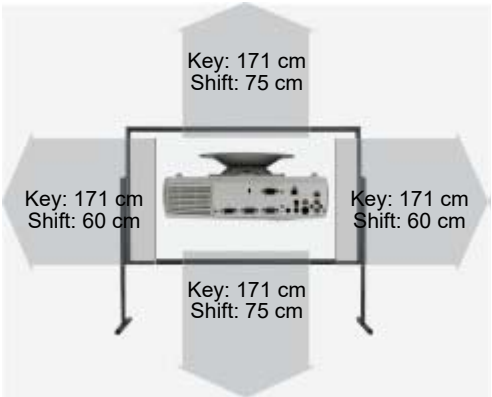

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.