

Panasonic PT-RX110 E/U/B/W

PANASONIC PT-RX110 E/U/B/W



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

The Panasonic PT-RX110 E/U/B/W laser DLP projector has 10000 Ansi lumens, a contrast of 10000:1 and an XGA 1024 x 768 resolution. The manufacturer Panasonic specifies a service life of 20000 hours, which is over 13.7 years with a daily viewing time of 4 hours. Including a lens shift and keystone correction function, which provides freedom during installation. An image width of up to 871 cm is possible, if the image width is smaller (we recommend max. 581 cm), rooms with residual light are also no problem. If the image width is not sufficient, the projector offers integrated edge blending software, which allows several projectors to project a large image together. Furthermore, the projector can play 1080P without any problems and can even project Blu-rays onto the ceiling thanks to 360° projection. It was launched in 2016 and is no longer offered by the manufacturer Panasonic.



1 x 0,7" DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Projector

10000

10000:1 full on/off

1,0000 min. Lumen

Vert.: +50% -13% Hori.: +30% -10%

XGA 1024 x 768

786.432 Pixel

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Stationary | Permanent installation in the training room and meeting room as well as the

conference room.

Very large screen width and rooms with plenty of light and shaded daylight.

Laserdiode

Article Nr.: N2QAYA000060

20000 h.

0,00 € Laser

Powered

Powered 1,41

F=1,7-1,9 f=25,6-35,7 mm

1,8-2,5:1


Nein

3333 Lux (bei 200 cm Screen)

10000:1 full on/off

0,333 min. Lumen

Screen

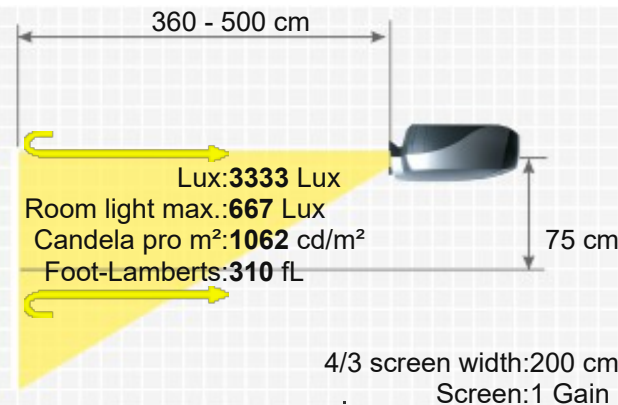

Connections	HDMI in DVI-D in D-sub 15pin in 5 x BNC RGBHV in RS232C Din 9 pin in RJ45 in DIGITAL LINK
Ceiling Mounting	Yes, is possible.
Power	-
Size WxHxD	498 x 200 x 538 mm (19,6"x7,9"x21,2") 53,58 L/dm³
Operating Noise	41dB

Weight 23,20 kg / 51,15 lbs.

Keystone Vert.: +/-40°


Illumination Hori.: +/-15°

90%
Frequenz H-sync: 15-100 kHz
V-sync: 24-120 Hz

Foot-Lamberts 310 fL / max. 871 cm screen width
1062 cd/m²

- Full HD 1080P compatible
- Lens shift Funktion
- Eco Mode
- 360° installable
- 24/7 continuous operation capable
- Edge Blending
- PJLink™
- Lan network compatible.
- Picture-in-picture
- DICOM simulation

Screen Mirroring -

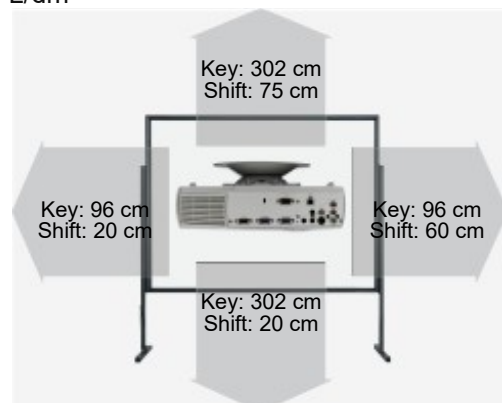

Optional accessories

	Objektiv Original	ET-DLE150	3.481,37 €
	Objektiv Original	ET-DLE060	4.005,06 €
	Objektiv Original	ET-DLE105	5.215,56 €
	Deckenhalterung Original	ET-PKD130B	EOL €
	Deckenhalterung Original	ET-PKD120S	EOL €
	Deckenhalterung Original	ET-PKD120H	EOL €
	Objektiv Gebraucht Original	ET-DLE250	1.898,73 €
	Objektiv Gebraucht Original	ET-DLE150Z	1.839,23 €
	Objektiv Gebraucht Original	ET-DLE450	1.482,23 €
	Objektiv Gebraucht Original	ET-DLE350	3.481,37 €
	Objektiv Gebraucht Original	ET-DLE030	4.363,33 €
	Objektiv Original	ET-DLE055	4.151,99 €
	Objektiv Gebraucht Original	ET-DLE085	2.811,38 €
	Fernbedienung Original	N2QAYA000060	30,40 €



Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
ET-DLE450	5.5-8.9:1	11-17.8 m	50-13%	30-10%	Powered
ET-DLE350	3.7-5.6:1	7.4-11.2 m	50-13%	30-10%	Powered
ET-DLE250	2.4-3.7:1	4.8-7.4 m	50-13%	30-10%	Powered
ET-DLE150	1.3-2:1	2.6-4 m	50-13%	30-10%	Powered
ET-DLE105	1-1.4:1	2-2.8 m	45-13%	28-10%	Powered
ET-DLE085	0.8-1:1	1.6-2 m	45-13%	28-10%	Powered
ET-DLE060	0.62-0.83:1	1.2-1.7 m	0.00% Fix		Powered
Fix Optional Lenses					
ET-DLE055	0.8:1	1.6 m	0.00% Fix		No Zoom
ET-DLE030	0.39:1	0.8 m			No Zoom

Status 2016 Discontinued (EOL) // Last update of the data: 2025-03-03
Created: 2016-02-12 12:14:38

Data



More Details



HCinema

<https://www.projector-database.com/pro/panasonicptrx110-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice.
HCinema is not responsible for any errors or omissions contained in product descriptions.