


projectiondesign cineo82 1080p



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

Weight

The large-screen cineo82 1080p DLP projector from projectiondesign has 10000 Ansi lumens, a contrast of 15000:1 and an HDTV 1920 x 1080 resolution. The built-in lens shift function provides freedom when setting up. 10000 Ansi lumens ensure that a picture width of 1016 cm is also possible. The projector manages rooms with residual light with a smaller image width, we recommend a maximum of 677 cm. Even 1080P video signals are no problem for the projector. The model built in 2011 is no longer offered by projectiondesign, but is still very popular in our projector database.



3 x DLP Chip

HDTV 16/9 Ti Digital Light Processing Chip

Projector

10000

15000:1 full on/off

0,6667 min. Lumen

Vert.: +/-62% Hori.: +/-44,5%

HDTV 1920 x 1080

2.073.600 Pixel

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Event | Very large screen width and rooms with plenty of light and shaded daylight.

330W UHP Lamp

Article Nr.: 400-0700-00

2000 h. 5000 h. in Eco Mode

-

Powered

Powered

optional

optional

Nein

HDMI 1.3a in

DVI-I mit HDCP in

5 BNC RGBHV in

YUV in

S-Video in

Cinch Video in

RS232C

RJ45 in

USB

2 x 12V Trigger out

Weitere Anschlüsse optional.

Yes, is possible.

-

604 x 250 x 501 mm (23,8"x9,8"x19,7") 75,65 L/dm³

-


26,00 kg / 57,32 lbs.

Screen


4444 Lux (bei 200 cm Screen)

15000:1 full on/off

0,296 min. Lumen

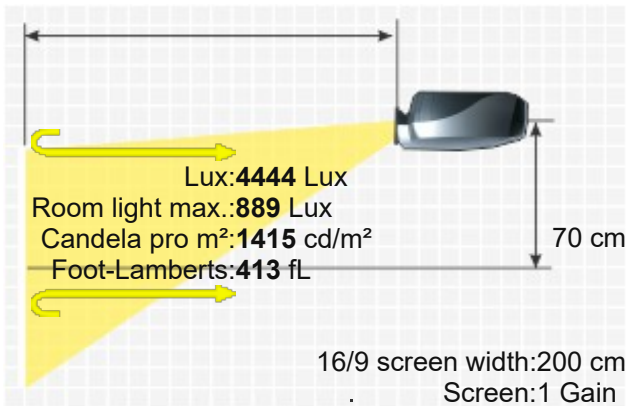

Keystone
Illumination -
Frequenz H-sync: 15-150 kHz
V-sync: 48-190 Hz
Foot-Lamberts 413 fL / max. 1016 cm screen width
1415 cd/m²
Features
- Full HD 1080P compatible
- Lens shift Funktion
- Eco Mode
- Gamma correction
- Digital image shift
- Remote control with laser pointer
- Lan network compatible.
Screen Mirroring -

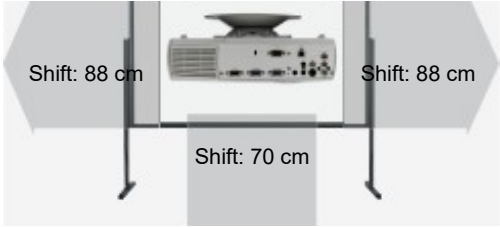

80P

Optional accessories

	Lampe Ruby	Ruby-LMP19592	259,59 €
	Lampe Original	R9801274 / 400-0700-00	EOL €
	Deckenhalterung Länge 225 mm	Halterung45	85,80 €

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
wide angle zoom 1.20-1.70:1	1.2-1.7:1	2.4-3.4 m	62%	+/-44.5%	Powered
standard zoom 1.70-2.50:1	1.7-2.55:1	3.4-5.1 m	62%	+/-44.5%	Powered
short tele zoom 2.50-4.00:1	2.5-4:1	5-8 m	62%	+/-44.5%	Powered
long tele zoom 3.90-6.24:1	3.9-6.24:1	7.8-12.5 m	62%	+/-44.5%	Powered
Fix Optional Lenses					
wide angle 0.74:1	0.74:1	1.5 m	0.0% Fix		No Zoom

Status
Data 2011 Discontinued (EOL) // Last update of the data: 2025-03-03

More Details



HCinema

<https://www.projector-database.com/pro/projectiondesigncineo82-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.