

Runco VX 4000d

RUNCO VX 4000D



The Runco model VX 4000d is a DLP projector with HDTV 1280 x 720 resolution and a contrast of 4000:1. With the lens shift function, the projector can be positioned very freely. The projector can illuminate an image width of up to 406 cm thanks to its 1600 Ansi lumens. In room lighting, however, the picture width should ideally be less than 271 cm. On the market since 2005, the model is no longer offered by the manufacturer Runco, but is still one of the very popular projectors. It should also be noted that, unfortunately, there are no longer any replacement lamps available for this projector, neither originals nor replicas.

Brief Introduction

Beta 2.5

Display Type

1 x HD2+ DLP Chip
HDTV 16/9 Ti Digital Light Processing Chip

Ansi-Lumen

Projector 1600 Screen 711 Lux (bei 200 cm Screen)

Contrast

4000:1 full on/off 4000:1 full on/off

Black Level

0,4000 min. Lumen 0,178 min. Lumen

Lens shift

Vert.: +/-60% Hori.: +/-25%

Resolution

HDTV 1280 x 720
921.600 Pixel

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Disc Recognition

DVD | HD Blu-ray (komprimiert) | 3D-Blu-ray | 4K-UHD-Blu-ray

Application

High-End Homecinema | Small screen width, rooms with very little ambient light below 100 lumens.

Light Source

250W NSH Lamp

Light Life

Articel Nr.: RUPA 004910 / 151-1031-00
2000 h.

Operating Costs

-

Focus

Powered

Zoom

Powered

Objective

optional

Throw Ratio

optional

Audio

-

Connections

DVI mit HDCP
Cinch Video in
S-Video in
RS232C

Ceiling Mounting


Yes

Power

380W

Size WxHxD

530 x 253 x 706 mm (20,9"x10"x27,8") 94,67 L/dm³

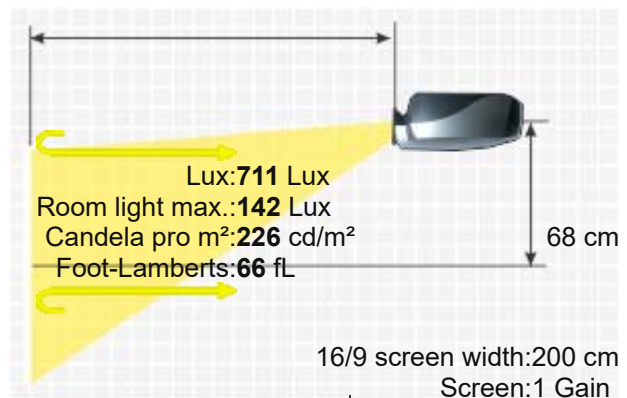

Operating Noise

-

Weight 33,10 kg / 72,97 lbs.

Keystone Vertical

Illumination

-

Frequenz

H-sync: 15-81 kHz

V-sync: 43-100 Hz

Range max.: 100 MHz

Foot-Lamberts

66 fL / max. 406 cm screen width

226 cd/m²

Features


■ Lens shift Funktion

■ Dynamic iris

■ Overscan adjustable

■ External video processor included.

■ 7 segments colour wheel 5 speed

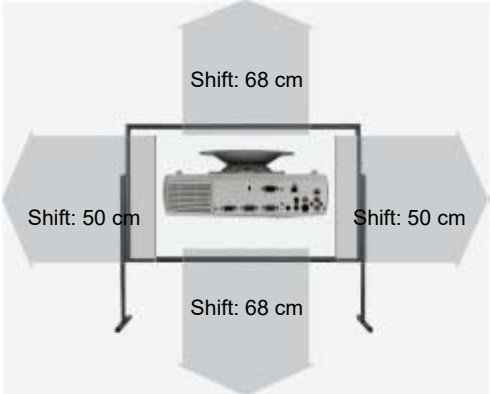

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
Runco Lens Option 5	3.6-5.7:1	7.2-11.4 m	60-24%	+/-16%	Powered
Runco Lens Option 4	2.35-3.6:1	4.7-7.2 m	60-24%	+/-16%	Powered
Runco Lens Option 3	1.77-2.35:1	3.5-4.7 m	60-24%	+/-16%	Powered
Runco Lens Option 2	1.4-1.77:1	2.8-3.5 m	60-24%	+/-13%	Powered
Runco Lens Option 1	1.2-1.4:1	2.4-2.8 m	60-24%	+/-10%	Powered
Fix Optional Lenses					
Runco Lens Option 6	0.67:1	1.3 m	0.0% Fix		No Zoom

Status 2005 Discontinued (EOL) // Last update of the data: 2023-08-04

Data



More Details



HCinema

<https://www.projector-database.com/pro/runcovx4000d-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.