

Sharp XG P25XE/U

SHARP XG P25XE/U



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

The stationary XG P25XE/U LCD has 4000 Ansi-Lumen, a contrast of 600:1 and an XGA 1024 x 768 resolution. The built-in lens shift function provides freedom when setting up. The projector can illuminate images up to 551 cm wide thanks to its 4000 Ansi lumens. The projector can create rooms with residual light with a smaller image width, max. 367 cm is recommended. On the market since 2002, the model is no longer offered by the manufacturer Sharp.



3 x 1,3" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Projector

4000
600:1 full on/off
6,6667 min. Lumen
Vert.: +50% -0%
XGA 1024 x 768

Screen

1294 Lux (bei 203 cm Screen)
600:1 full on/off
2.168 min. Lumen

786.432 Pixel

SXGA 1280 x 1024 compressed

HDTV (525i/525P/750P/1125i)

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Wide screen width or rooms with plenty of light (over 200 lumens).

270W UHP Lamp

Articel Nr.: RLMPFA002WJZZ

1500 h.

-

Powered


Powered 1,3

F=1,7-2,4 f=49,2-63,8 mm

1,8-2,4:1

2 x 2W Stereo 2 x 4,5 cm

DVI-I in
D-sub 15pin in und out
Mini Jack in
YUV über BNC
RS232C
Cinch Video in
Cinch Stereo in
Wired Fernbedienung

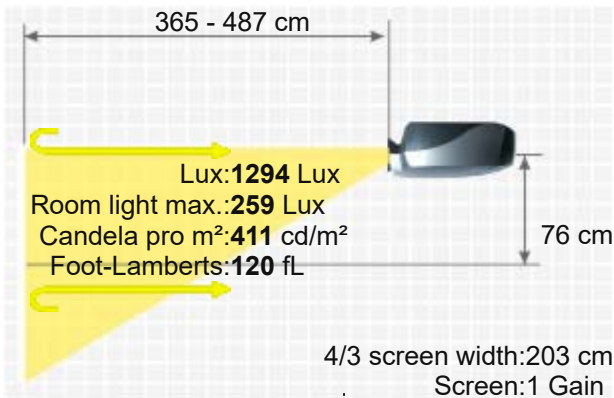

Ceiling Mounting

Power

Size WxHxD

Operating Noise

Mini Jack out

S-Video in

Yes

340W standby 0,7W

322 x 188 x 445 mm (12,7"x7,4"x17,5") 26,94 L/dm³

37 / 35 dB in Eco Mode

Weight

Keystone

Illumination

Frequenz

Foot-Lamberts

9,70 kg / 21,38 lbs.

-

85%

H-sync: 15-126 kHz

V-sync: 43-200 Hz

Range max.: 230 MHz

120 fL / max. 551 cm screen width

411 cd/m²

- Features
- Lens shift Funktion
 - Freeze
 - Eco Mode
 - Kensington Slot
 - Gamma correction
 - Digital image shift
 - Password protection
 - Crestron®-Software compatible.
 - digital zoom
 - power-saving mode lamp reduction

Optional

Osram bulb only

Lamp ruby

Lamp original

Compatible lamp

Universal Remote original

Air filter original

Ceiling Mount 100-120

NLMP3692

Ruby-LMP3692

BQC-XGP25X//1 / AN-P25LP

LMP-K3692

Fernb-uni-V3

PFILD0080CEZZ

Halterung100

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n3692>

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
AN-W6EZ	1.3-1.7:1	2.6-3.5 m	50%		Powered
AN-T6EZ	2.5-3.3:1	5.1-6.7 m	50%		Powered
AN-P48EZ	4.6-6.1:1	9.3-12.4 m			Powered
Fix Optional Lenses					
AN-P9MX	0.9:1	1.8 m			No Zoom

Status

2002 Discontinued (EOL) // Last update of the data: 2023-08-04



More Details

Hcinema

<https://www.projector-database.com/pro/sharpxgp25x-en.html>