

Sharp XG P610X/N

SHARP XG P610X/N



Brief Introduction

Beta 2.5

The Sharp model XG P610X/N is a DLP projector with XGA 1024 x 768 resolution and a contrast of 1800:1. The built-in lens shift and keystone correction function provides freedom when setting up. An image width of up to 675 cm is possible, if the image width is smaller (we recommend max. 450 cm), rooms with residual light are also no problem. Even 1080P video signals are no problem for the projector. On the market since 2008, the model is no longer offered by the manufacturer Sharp.

Display Type



3 x 0,7" DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

6000

2000 Lux (bei 200 cm Screen)

Contrast

1800:1 full on/off

1800:1 full on/off

Black Level

3,3333 min. Lumen

1,113 min. Lumen

Lens shift

Vert.: +/-55% Hori.: +/-35%

Resolution

XGA 1024 x 768

786.432 Pixel

UXGA 1600 x 1200 compressed

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very large screen width and rooms with plenty of light and shaded daylight.

Light Source

2 x 280W Lamp

Articel Nr.: AN-P610LP

Light Life

2000 h. 3000 h. in Eco Mode

Operating Costs

-

Focus

Powered

Zoom

Powered 1,25

Objective

f=25,5-32,0 mm / N optional

Throw Ratio

1,79-2,25:1

Audio

2 x 3W Stereo

Connections

DVI-D in
5 X BNC RGBHV in
D-sub 15 pin in
S-Video in
Cinch Stereo in
Mini Jack Audio in
RJ45 in
RS232C Din 9 pin in

Ceiling Mounting

Yes

Power


710W

Size WxHxD

500 x 190 x 637 mm (19,7"x7,5"x25,1") 60,52 L/dm³

Operating Noise

39 / 37 dB in Eco Mode

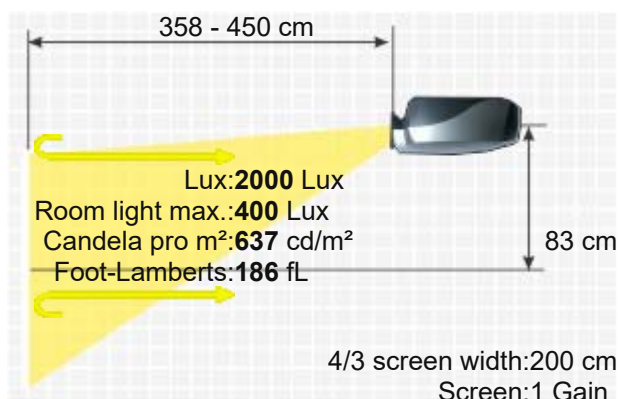

Weight

26,00 kg / 57,32 lbs.

Keystone

Vertical und horizontal

Illumination

-

Frequenz

H-sync: 15-126 kHz
V-sync: 43-200 Hz

Foot-Lamberts

186 fL / max. 675 cm screen width
637 cd/m²

- Features

- Full HD 1080P compatible
 - Direkt Power Off
 - Lens shift Funktion
 - Freeze
 - Eco Mode
 - Kensington Slot
 - sRGB
 - Gamma correction
 - Digital image shift
 - Password protection
 - Remote control with backlight
 - PJLink™
 - Control via web browser
 - Lan network compatible.

	Bulb only Osram	NLMP18492
	Lamp ruby	Ruby-LMP18492
	Lamp original	AN-P610LP
Optional	Compatible lamp	LMP-K18492
	Universal Remote original	Fernb-uni-V3

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n18492>

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
N-P15EZ	1.5-1.8:1	3-3.6 m	+/-55%	+/-35%	Powered
AN-P45EZ	4.5-7:1	9-14 m	+/-55%	+/-35%	Powered
AN-P30EZ	3-4:1	6-8 m			
AN-P23EZ	2.35-3:1	4.7-6 m	+/-55%	+/-35%	Powered
AN-P18EZ	1.8-2.25:1	3.6-4.5 m	+/-55%	+/-35%	Powered
Fix Optional Lenses					
AN-P8EX	0.8:1	1.6 m	0.0% Fix		No Zoom
AN-P12EX	1.2:1	2.4 m			No Zoom

Status

2008 Discontinued (EOL) // Last update of the data: 2023-08-04

Data

More Details



HCinema

<https://www.projector-database.com/pro/sharpxgp610x-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.

