

# Vivitek DU7295Z

VIVITEK DU7295Z



The Vivitek DU7295Z 3D DLP projector has 9000 Ansi lumens, a contrast of 20000:1 and a WUXGA 1920 x 1200 resolution. Includes a lens shift and keystone correction function, which provides freedom during installation. An image width of up to 964 cm is possible, if the image width is smaller (we recommend max. 643 cm), rooms with residual light are also no problem. Furthermore, the projector can play 1080P and 4K (compressed) as well as 3D without any problems, and therefore all currently available Blu-ray formats can be recognized by the projector.

## Brief Introduction Beta 2.5

### Display Type

1 x DLP Chip  
WUXGA 16/9 Ti Digital Light Processing Chip

### Ansi-Lumen

9000

4000 Lux (bei 200 cm Screen)

### Contrast

20000:1 full on/off

20000:1 full on/off

### Black Level

0,4500 min. Lumen

0,2 min. Lumen

### Lens shift

Vert.: +55% -15% Hori.: +/-5%

### Resolution

WUXGA 1920 x 1200

2.304.000 Pixel

UHD (4K2K) 3840 x 2160 compressed

### Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD (komprimiert), 3D, EDTV 480p, 576p

### 3D Compatibility

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom

Frame Sequential (3D Ready)

### Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very large screen width and rooms with plenty of light and shaded daylight.

### Light Source

Laser Phosphor

### Light Life

-

### Operating Costs

0,00 € Laser

### Focus

Manual

### Zoom

Manual

### Objective


optional

### Throw Ratio

optional

### Audio

2 x 10W

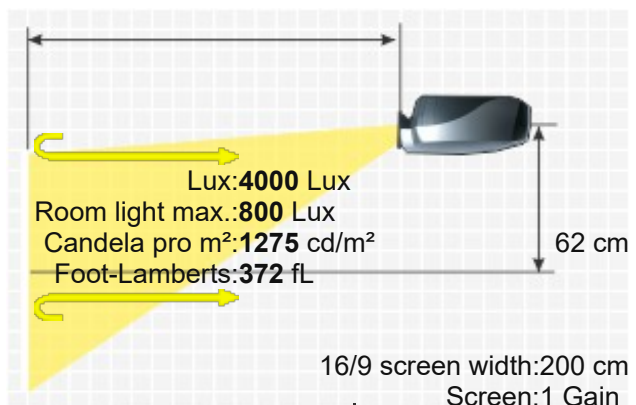

2 x HDMI in  
DVI in  
D-sub 15pin in und out  
5 X BNC RGBHV  
Cinch Video in  
Cinch Stereo in  
Mini Jack Audio in und out  
USB in  
RS232C Din 9 pin in  
RJ45 in  
HDBaseT in

Connections




Ceiling Mounting  
Power  
Size WxHxD  
Operating Noise

Yes, is possible.  
-  
470 x 202 x 517 mm (18,5"x8"x20,4") 49,08 L/dm³  
40 / 36 dB in Eco Mode

Weight  
Keystone  
Illumination  
Frequenz  
Foot-Lamberts  
Features  
Screen Mirroring

23,00 kg / 50,71 lbs.  
Vert.: +/-30°  
Hori.: +/-25°  
-  
-  
372 fL / max. 964 cm screen width  
1275 cd/m²  
■ Real Full HD 3D  
■ Full HD 1080P compatible  
■ Lens shift Funktion  
■ Eco Mode  
■ Lan network compatible.  
■  
-

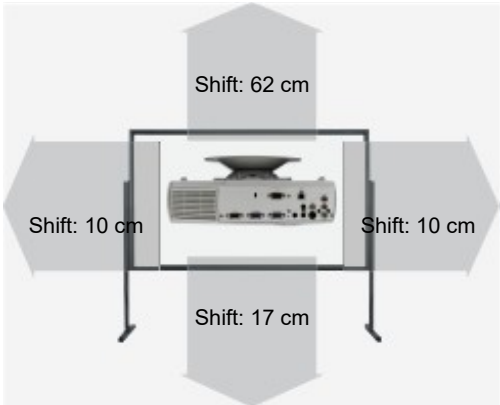

Optional accessories

|  |                        |                         |         |
|--|------------------------|-------------------------|---------|
|  | Objektiv Original      | 5811119237-SVV / VL908G | EOL €   |
|  | Objektiv Original      | 5811120865-SVV / VL906G | EOL €   |
|  | Fernbedienung Original | 5041846600              | 70,10 € |
|  | Deckenhalterung 220    | Halterung45             | 83,60 € |

Optional Lenses

| Name                            | Ratio       | Distance  | Shift V | Shift H | Zoom   |
|---------------------------------|-------------|-----------|---------|---------|--------|
| Zoom Optional Lenses            |             |           |         |         |        |
| 5811122743SVV (VL912G/LNS5SZ12) | 1.25-1.6:1  | 2.5-3.2 m | 55-15%  | +/-5%   | Manual |
| 5811122742SVV (VL911G/LNS5WZ2)  | 0.77-1.1:1  | 1.5-2.2 m | 55-15%  | +/-5%   | Manual |
| 5811120865SVV (VL906G/LNS7SZ1)  | 1.54-1.93:1 | 3.1-3.9 m | 55-15%  | +/-5%   | Manual |
| 5811120055SVV (LNS5LZ2)         | 3-5.01:1    | 6-10 m    | 55-15%  | +/-5%   | Manual |
| 5811120054SVV (VL907G/LNS5STZ)  | 1.1-1.3:1   | 2.2-2.6 m | 55-15%  | +/-5%   | Manual |
| 5811119237SVV (VL908G/LNS7LZ1)  | 1.93-2.89:1 | 3.9-5.8 m | 55-15%  | +/-5%   | Manual |

Fix Optional Lenses

Status

2020 Discontinued (EOL) // Last update of the data: 2025-04-07  
Created: 2020-03-13 10:54:40

Data



More Details



HCinema

<https://www.projector-database.com/pro/vivitekdu7295z-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.