

Wolf Cinema TXF-12000

WOLF CINEMA TXF-12000



With the TXF-12000, manufacturer Wolf Cinema offers a large-size DLP laser projector with UHD (4K2K) 3840 x 2160 resolution and a contrast of 25000:1. The laser has a service life of 20000 hours, which would be the equivalent of over 13.7 years at 4 hours per day. An image width of up to 1507 cm is possible, if the image width is smaller (we recommend max. 1005 cm), rooms with residual light are also no problem. Video signals 1080P and 4K as well as 3D are also no problem for the projector, which means that all Blu-ray formats currently available can be recognized by the projector.

3 x DLP Chips
HDTV 16/9 Ti Digital Light Processing Chip

Projector	22000	9778 Lux (bei 200 cm Screen)
Contrast	25000:1 full on/off	25000:1 full on/off
Black Level Offset	0,8800 min. Lumen	0,391 min. Lumen

UHD (4K2K) 3840 x 2160

8.294.400 Pixel / FHD E-Shift

Video Modes Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD (komprimiert), 3D, EDTV 480p, 576p

3D Compatibility Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom

Frame Sequential (3D Ready) | 2D-zu-3D Video Converter

Application Event | Very large screen width and rooms with plenty of light and shaded daylight.

Light Source Laser

Light Life 20000 h.

Operating Costs 0,00 € Laser

Focus Powered


Zoom Powered

Objective optional

Throw Ratio optional

Audio -

Connections HDMI 2.0 in
USB in
RS232C Din 9 pin in
RJ45 in
HDBaseT in

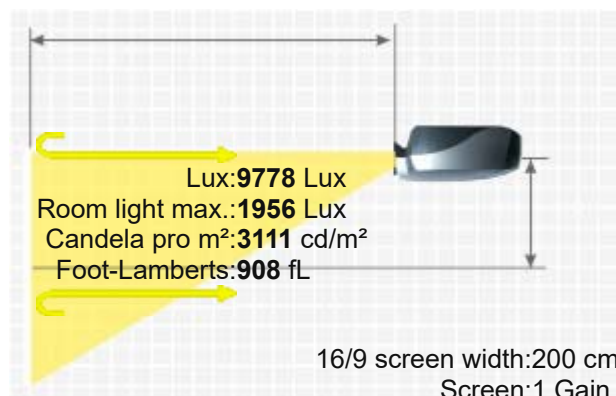

Brief Introduction
Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

3D Compatibility

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting
Power
Size WxHxD
Operating Noise

12V Trigger out
Yes
-
-
46dB

Weight
Keystone
Illumination

Frequenz

-
-
-

-

Foot-Lamberts

908 fL / max. 1507 cm screen width
3111 cd/m²

Features

- Real Full HD 3D
- Full HD 1080P compatible
- High Dynamic Range (HDR)
- Warping
- PJLink™
- Optional Wi-Fi network compatible.
- Lan network compatible.
- Crestron®-Software compatible.
- Extron XTP®

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
WC-LS-12000-XST	0.78-1:1	1.6-2 m			Powered
WC-LS-12000-XLT	8.85-16.5:1	17.7-33 m			Powered
WC-LS-12000-ULT	5.55-8.85:1	11.1-17.7 m			Powered
WC-LS-12000-ST	1.55-2.05:1	3.1-4.1 m			Powered
WC-LS-12000-SH	1.12-1.3:1	2.2-2.6 m			Powered
WC-LS-12000-MT	2-2.9:1	4-5.8 m			Powered
WC-LS-12000-LT	2.9-5.6:1	5.8-11.2 m			Powered
Fix Optional Lenses					
WC-LS-12000-FXT	0.7:1	1.4 m			No Zoom

Status 2022 Current model // Last update of the data: 2024-05-16

Data



More Details



HCinema

<https://www.projector-database.com/pro/wolfcinematxf12000-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.